



# Metal Point Boltless Shelving





## Metal Point Boltless Shelving

Storage-related processes have become a strategic element in supply chain management, and therefore in the creation of value in business.

Moreover, a detailed study of the needs and operations performed in a warehouse is essential in order to optimise space and thus reduce costs and time taken to prepare orders.

Installing Metal Point boltless shelving makes this reduction in cost and time possible. In addition to being a highly versatile and adaptable system, it is easy to keep goods well ordered thanks to the wide range of models and accessories available.

The Mecalux Group has more than 50 years' experience in the installation of storage systems and equipment across all sectors of the market, using the most advanced technology in the industry.



## Contents

Features .....	4
Advantages .....	5
Heavy-Duty Metal Point Shelving .....	6
Basic components .....	7
Applications .....	12
Medium-Duty Metal Point Shelving .....	14
Basic components .....	15
Applications .....	17
Light-Duty Metal Point Shelving .....	18
Basic components .....	19
Metal Point Shelving with Raised Walkways .....	20
Basic components .....	21

*Metal Point boltless shelving can be adapted for endless uses and applications in your warehouse, office, or home... For any kind of load that you need to store, and keep in perfect order, there is a Metal Point shelf for you!*



## Features of Metal Point Shelving

**A boltless storage system that can be easily adapted to any setting, from the warehouse to your home.**

At the forefront of structural design, calculation and testing, in accordance with the latest FEM standards, Metal Point shelving is the perfect choice in both small and large installations.

Thanks to the quality of the steel, the advanced manufacturing systems and

its simple yet exclusive assembly, Metal Point shelving is far superior to other picking systems on the market.



### Advantages of Metal Point Boltless Shelving

- **Easy to assemble.** All of the pieces fit perfectly together, quickly and easily, using just a plastic or rubber mallet, without any need for bolts.
- **Fully modular.** Extra modules or additional levels with raised walkways can be added, making installation possible in any location or for any business.
- **Versatile.** There are Metal Point shelves for all loads and weights.
- **Great durability.** A coat of polyester-epoxy paint at least 50 to 75 microns thick guarantees a long-lasting, perfect finish.





## Heavy-Duty Metal Point Shelving

Ideal for storing heavy items or products in your warehouse, workshop, store, business, office or any other industrial premises. Metal Point is available in a variety of sizes and can be adapted to suit any need.




The simple structure makes it possible to install several load levels, up to a maximum height of 3,762 mm, and allows for easy extension of the warehouse's length simply by adding as many modules as necessary.

Chipboard panels are the most commonly used, as these can hold loads of up to 960 kg per level, when loads are evenly distributed.






### Standard colours

#### Upright

-  RAL 5019
-  RAL 7032
-  Galvanised

#### Beam

-  RAL 2004
-  RAL 7032
-  Galvanised

#### Maximum load

Height (H): 1,981 / 2,438 / 3,048 / 3,657 mm

For depths (B) of 316 / 468 / 621 mm:

Length (L)	1,231	1,536	1,841	2,146	2,450
NLE	590	440	190	-	-
NLE+NSTS	770	640	420	-	-
NCLE	960	706	536	400	200
NCLE+NSTS	1,100	800	610	577	545



For depths (B) of 773 / 926 / 1.231 mm:

Length (L)	1,231	1,536	1,841	2,146	2,450
NLE	467	344	200	-	-
NLE+NSTS	800	640	420	-	-
NCLE	760	560	420	323	200
NCLE+NSTS	920	860	740	620	500


Evenly distributed load in kg/level. Dimensions in mm.

## Basic components


1. Bracket
2. NLE beam
3. NCLE beam
4. Cross-tie
5. Bracing
6. Chipboard panel
7. Galvanised panel
8. Slotted metal panel
9. Joining profile
10. Ending profile
11. Bracket union
12. Plastic footplate
13. Single metal footplate
14. Double metal footplate
15. Shim plate

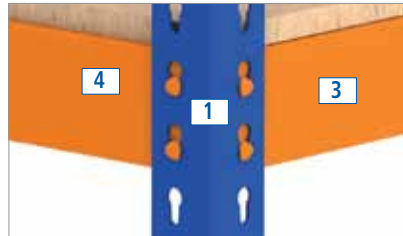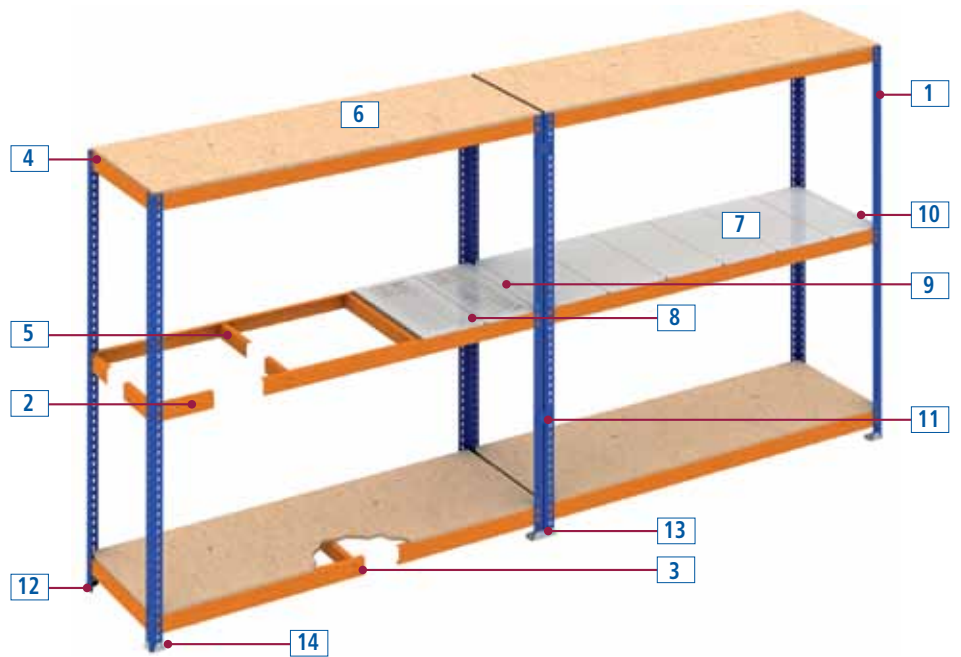

Joint between bracket (1), cross-tie (4) and beam (3)

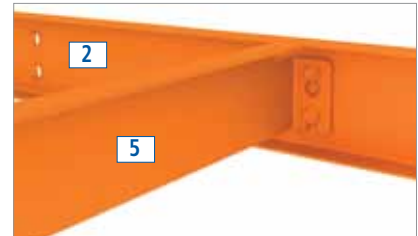

Joint between beam (2) and bracing (5)



### Bracket

A slotted L-shaped piece into which the beams are fitted.

Its dimensions are 48 x 48 mm with a steel thickness of 1.5 or 2 mm. The height varies depending on requirements.



### Plastic footplate


Fitted to the base of the uprights, this ensures the structure is well supported, and avoids direct contact between the uprights and the floor.



### Metal footplates

Placed under the bracket as a supporting piece, distributing the load evenly on the floor, these pieces are used instead of plastic covers for heavy loads.

There are two models: single (13) and double (14). The single model has only one bracket, while the double connects the brackets of two different modules.

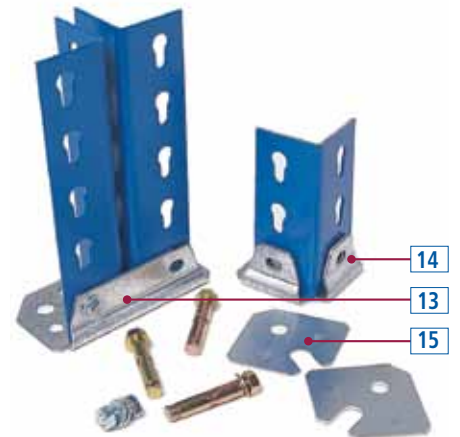

### Shim plates (15)

These plates are placed under the metal footplates when the shelving needs to be adjusted to sit flush on the floor.






**NLE and NCLE beams**


These profiles are fitted to the uprights and used to support the panels. One or the other is used depending on whether the panels are made of wood or metal.

Beam length	
NLE	NCLE
1,231	1,536
1,536	1,841
1,841	2,146
	2,450

Length in mm.



NLE Beam

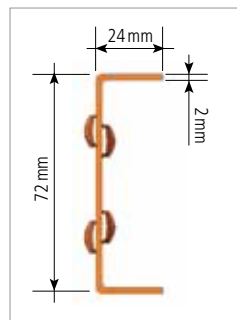


NCLE Beam

**Cross-tie**

This profile is used to join the brackets, to ensure structural rigidity. It is also used for support.

The most common lengths are: 279, 468, 621, 773, 926 and 1,231 mm.








### Bracing

This piece is placed across the beams to reinforce the panels, preventing them from becoming bowed. Chipboard panels are generally braced in the middle of the beam.

The most common lengths are: 468, 621, 773, 916 and 1,231 mm.



### Spacer

A piece of galvanised metal used to fix the shelving to the wall. It is secured in position by a locking pin, which holds the spacer and bracket together in the event of sudden movements.




### Bracket union

This piece is used to join two modules together lengthwise, ensuring correct alignment and spacing while guaranteeing the structural rigidity in this plane.



Locking pin

Spacer

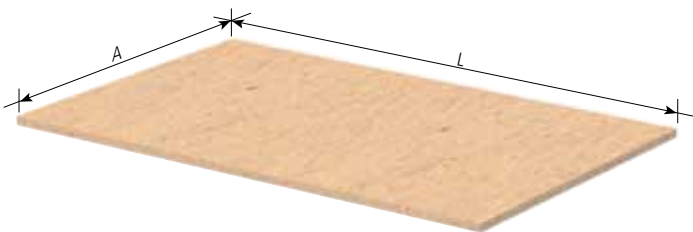

**Chipboard or melamine panels**

16 mm thick panels that are placed on N LE beams.

When two chipboard panels are used, two connecting clips are fitted per shelf, one on each beam, to prevent them from moving.

Dimensions of the panels	
Width (A)	Length (L)
316	1,231/1,536/1,841/2,146/2,450
468	1,231/1,536/1,841/2,146/2,450
621	1,231/1,536/1,841/2,146/2,450
773	1,231/1,536/1,841/2,146/2,450
926	1,231/1,536/1,841/2,146/2,450
1,231	1,231/1,536/1,841/2,146/2,450

Dimensions in mm.




Connecting clip (16)



### Metal Panels


These panels, made from a single piece of galvanised sheet metal with folded edges, are able to support large loads.

Their width can vary, so a different number of panels may be placed on each level. The number depends on the length of each panel and of the module as a whole.

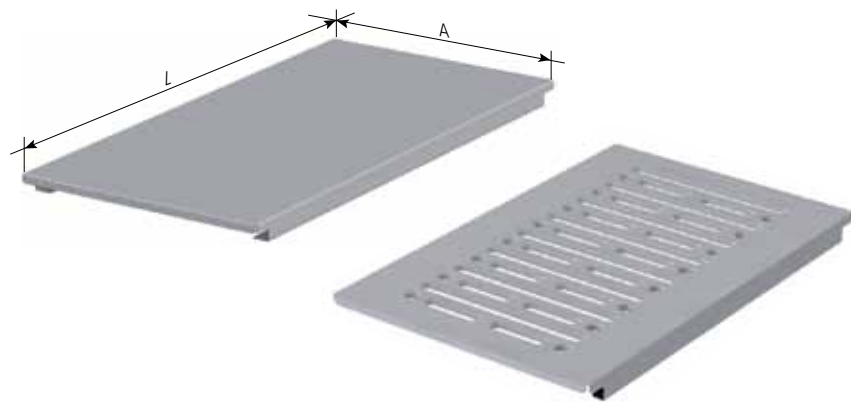

Dimensions of the panels	
Width (A)	Length (L)
260	621/1,231/1,536/1,841/2,146/2,450
305	621/1,231/1,536/1,841/2,146/2,450

Dimensions in mm.

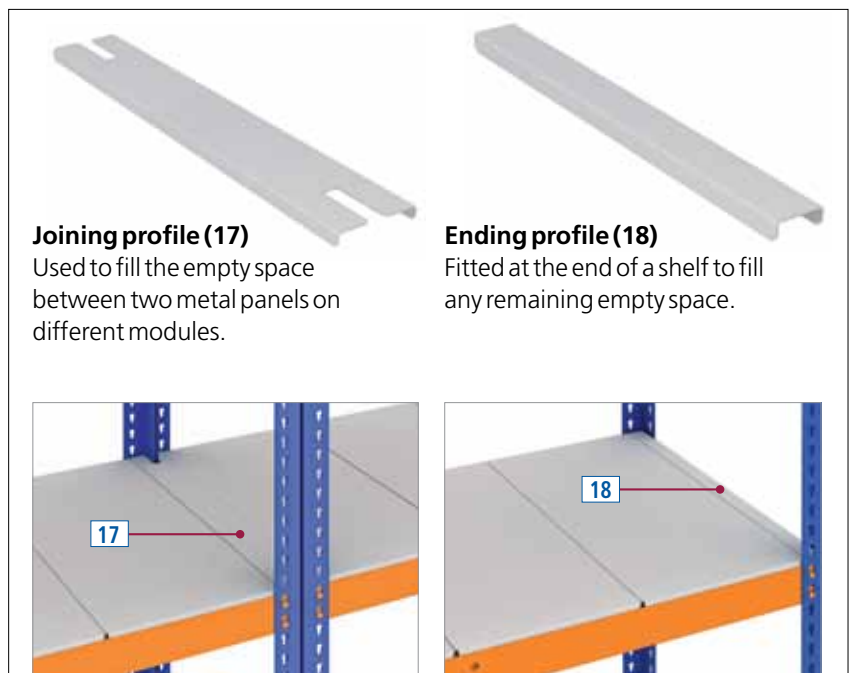

**Joining profile (17)**  
Used to fill the empty space between two metal panels on different modules.

**Ending profile (18)**  
Fitted at the end of a shelf to fill any remaining empty space.

**Applications**

The versatility of this system offers a wide range of solutions, such as shelves, benches, tables, cupboards and more.

**Workbenches and tables**

Mecalux offers many combinations of the Metal Point Plus system that can be adapted to suit any need, available in a wide variety of sizes and capable of carrying loads of up to 450 kg.

With Metal Point Plus workbenches, you will be able to organise all of your tools with ease.



Workbench with shelves and footrest



Workbench with footrest



Workbench with tool cabinet



Packaging bench



Work table with footrest



Shelf unit with drawers



Work table



Work table with tool drawer



Auxiliary table with wheels



Tool cabinet



Bench



### Tyre racks

The sturdy construction of these racks makes them ideal for storing car tyres.



Single tyre rack



Double tyre rack

### Shelves for upright storage

Mecalux also offers a Metal Point Plus shelf type for storing paper, cardboard, hanging garments, etc.



Upright storage of items



Shelves for hanging garments or other items




## Medium-Duty Metal Point Shelving



## Medium-Duty Metal Point Shelving




An attractive design means that these shelves can be adapted for any setting where items of medium weight need to be stored.

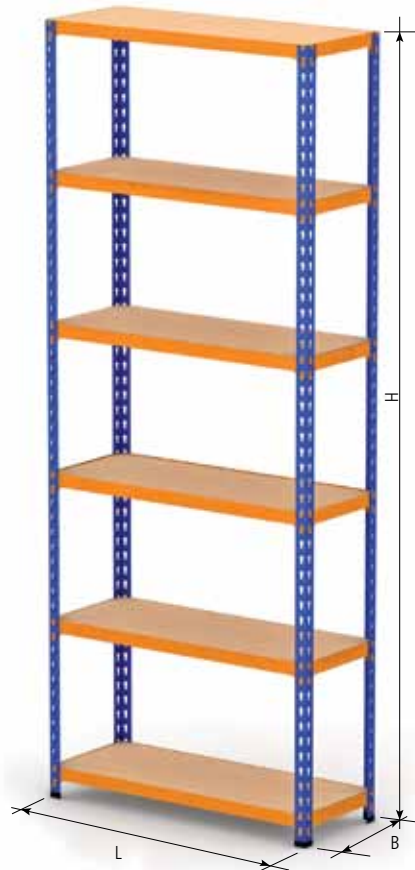With chipboard shelves they can hold evenly distributed loads of up to 375 kg per level.



### Standard colours

#### Upright

-  RAL 5019
-  RAL 8017
-  Galvanised

#### Beam

-  RAL 8024
-  RAL 2004
-  RAL 7032
-  Galvanised

### Maximum load

Height (H): 1,981 / 2,438 / 3,048



For depths (B) of 316 / 377 / 468 / 621 mm:

Width (L)	621	743	926	1,027	1,231
	500	375	340	275	200

Evenly distributed load in kg/level. Dimensions in mm.

## Basic components

1. Bracket
2. Beam
3. Cross-tie
4. Chipboard or melamine panel
5. MR2 galvanised panel
6. Plastic footplate
7. Retainer
8. Divider

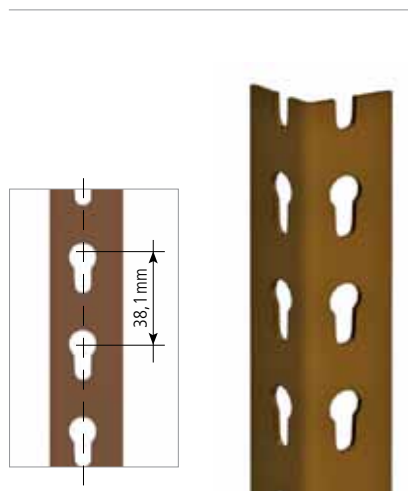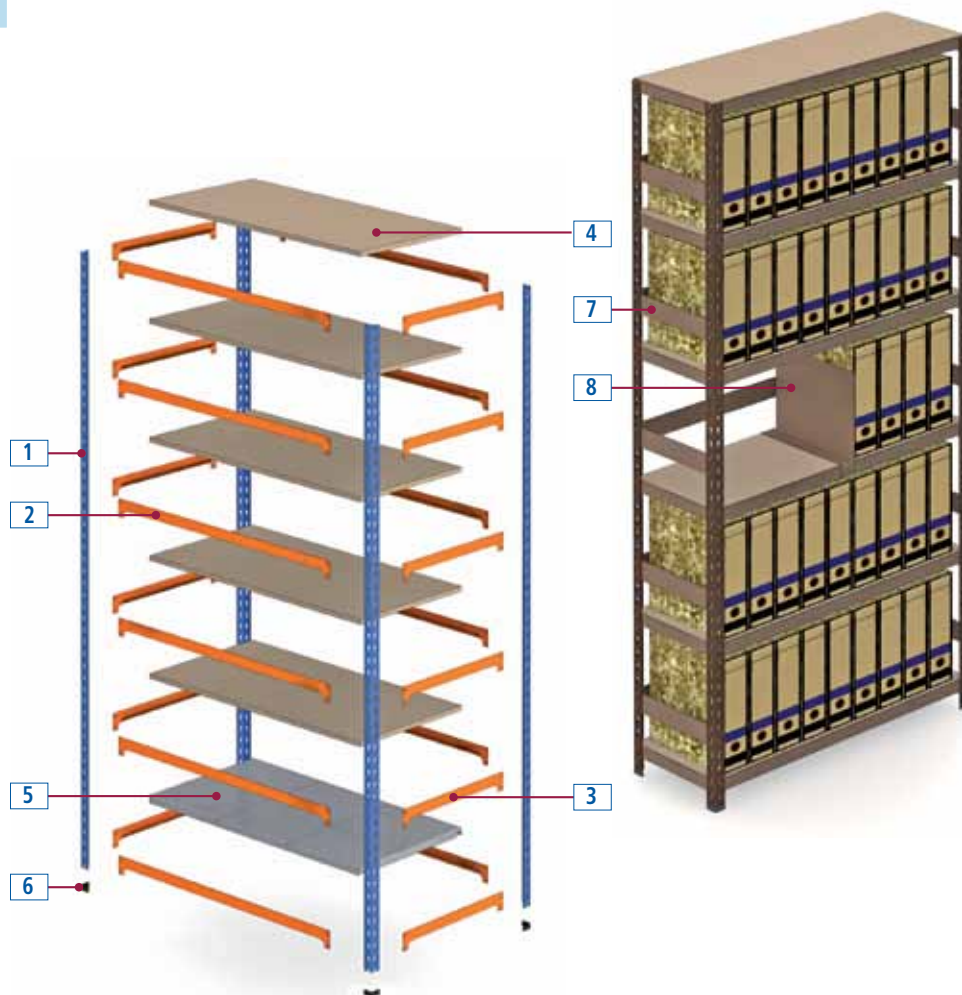

### Bracket

A slotted L-shaped piece into which the beams are fitted. It differs from the heavy-duty brackets in terms of its size: 31.7 x 31.7 mm with a steel thickness of 1.8 mm.

These uprights can reach a maximum height of 3,048 mm.



Securing pin

Spacer

### Spacer

A metal piece used to fix the shelf to the wall. Normally a securing pin is used to hold the parts in place, and prevent them separating if they experience any movement.



### Plastic Footplate

Placed on the bottom of the bracket to cushion its contact with the floor.



### TE-2 Union

This is the metal piece that joins the uprights of two different modules, aligning them and ensuring the rigidity of the structure.



**Beam**


This is the profile which is fitted to the bracket, used to bear the horizontal load. Its function is not only to join two uprights, but also to create a level and support the panel on which the load rests.

The length of this beam is: 1,536 mm.

**Cross-tie**

A short profile used to join the two brackets which hold the load-bearing beams, to ensure structural rigidity.

The most common lengths are: 316, 377, 468, 621, 743, 926, 1,027, and 1,231 mm.

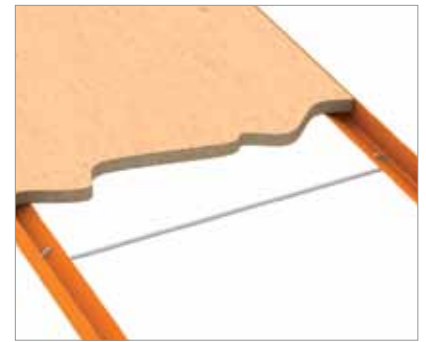

**Cross bracing**

When it is necessary to increase the load capacity on a level, cross bracing is added to the beams. These pieces are fixed to both beams approximately halfway along their length.



**Wooden panel**

Available in different sizes to suit any need.

It can be made from bare chipboard or melamine.



**Metal panels**

These galvanised panels fit exactly onto the beams, slotting over the vertical edges.

A level is made up of several panels of varying widths depending on the overall width of the level and the weight of the product to be stored.



**Retainers and dividers**

These accessories are used to prevent the goods stored on the shelves from falling.



Divider

**Load capacities**

	Width		Length			
	621	743	926	1,027	1,231	
<b>316</b>	500	375	340	275	200	
<b>377</b>	500	375	340	275	200	
<b>468</b>	500	375	340	275	200	
<b>621</b>	500	375	340	275	200	
<b>743</b>		375	340	275	200	
<b>1,231</b>			340	275	200	

Evenly distributed load in kg/level.  
Dimensions in mm.

**Load capacities**

	Length		
	621	926	1,231
<b>316</b>	180	135	101
<b>377</b>	200	143	104
<b>468</b>	214	178	114
<b>621</b>	172	188	124


Evenly distributed load in kg/level.  
Dimensions in mm.





### Applications

Medium-duty Metal Point shelving has numerous applications thanks to the wide range of accessories available. This makes it extremely versatile, and it can be used in virtually any setting.

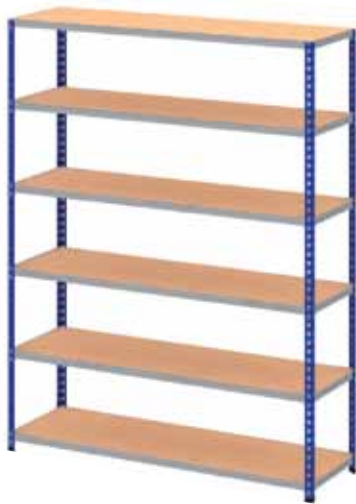

### Fabric racks

Items of clothing or other products can be hung from this shelving unit simply by adding levels with hanging rails.

The combinations are endless, as the shelves are completely adjustable.



### Wine storage racks

Metal Point light-duty shelving is also ideal for storing bottles of wine.





## Light-Duty Metal Point Shelving



This is the simplest member of the Metal Point boltless shelving family.

It consists of a very simple structure that can hold up to 80 kg per level, making it ideal for the storage of light loads.

The dimensions of each module are 907 x 307 mm and the height can be 900 or 1,700 mm.

### Dimensions


Height (H)	Depth (D)	Width (W)
900	307	907
1,700	307	907


Dimensions in mm.

### Standard colour

#### Upright and beam

 RAL 7032

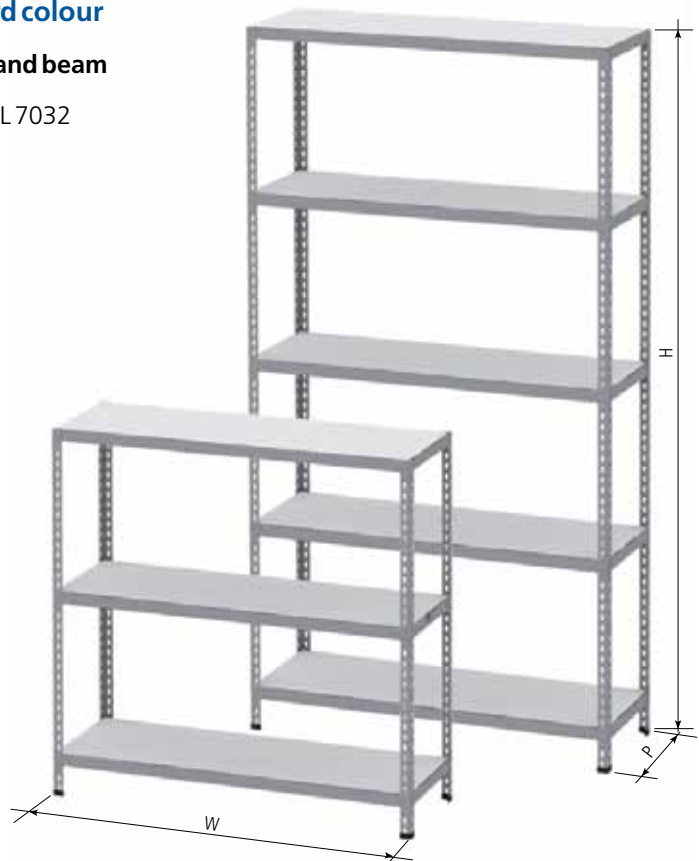

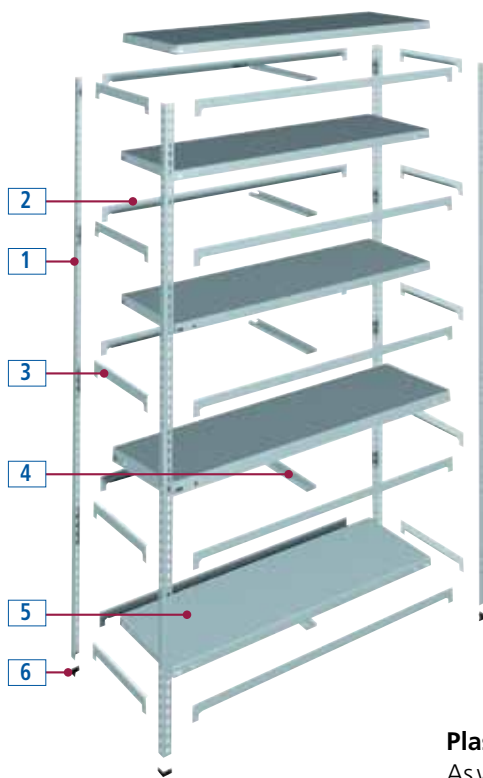

### Basic components

1. Upright
2. Beam
3. Cross-tie
4. Cross bracing
5. Metal panel
6. Plastic footbase



#### Plastic footplate


As with the other Metal Point models, this is placed at the bottom of the bracket to ensure the correct contact with the floor.



#### Bracket

A slotted bar into which beams and cross-ties are fitted.

There are two different heights: 900 or 1,700 mm.

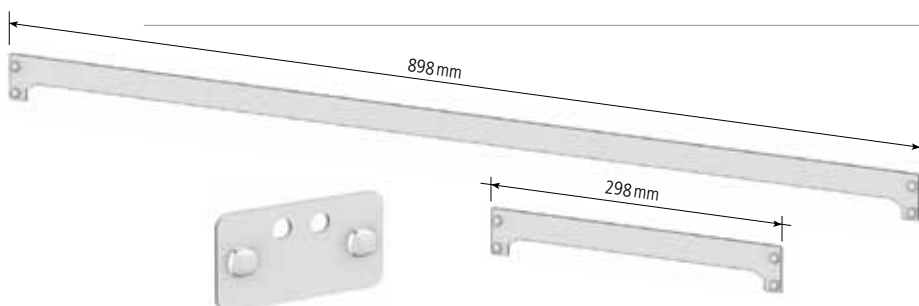

#### TE-3 Union

A piece used to join two modules lengthwise, ensuring they are aligned.

#### Beam and cross-tie


Both elements are inserted into the upright to form a compact structure. They also support the panels.

The beam is 898 mm long and the cross-tie is 298 mm long.



#### System for fixation

In this case the shelving is fixed to the wall using screws (universal fixation system).

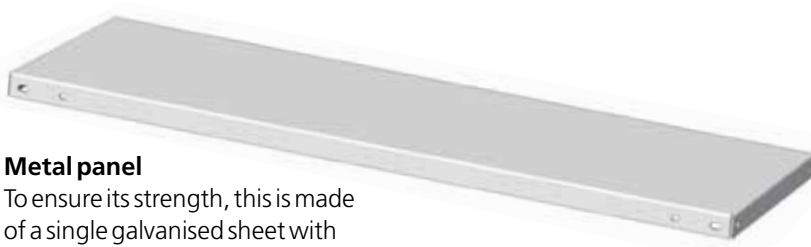

#### Metal panel

To ensure its strength, this is made of a single galvanised sheet with folded edges. It can carry loads of 80 kg.



#### Cross bracing

The piece that is fitted in the midpoint of a panel to provide extra strength.



## Metal Point Shelving with Raised Walkways

Metal Point shelving allows for raised walkways to be installed in order to optimise vertical space, doubling the storage area.

In order to access the different levels, stairs can be installed in specific locations, selected based on the criteria of accessibility and safety. Thanks to this feature, endless combinations can be created to suit the specific needs of each warehouse.

Furthermore, this system's adaptability means that existing warehouses can be extended to make them longer or wider.



### Standard colours

#### Upright and beam



RAL 5019




RAL 2004



Extended width



Extended length

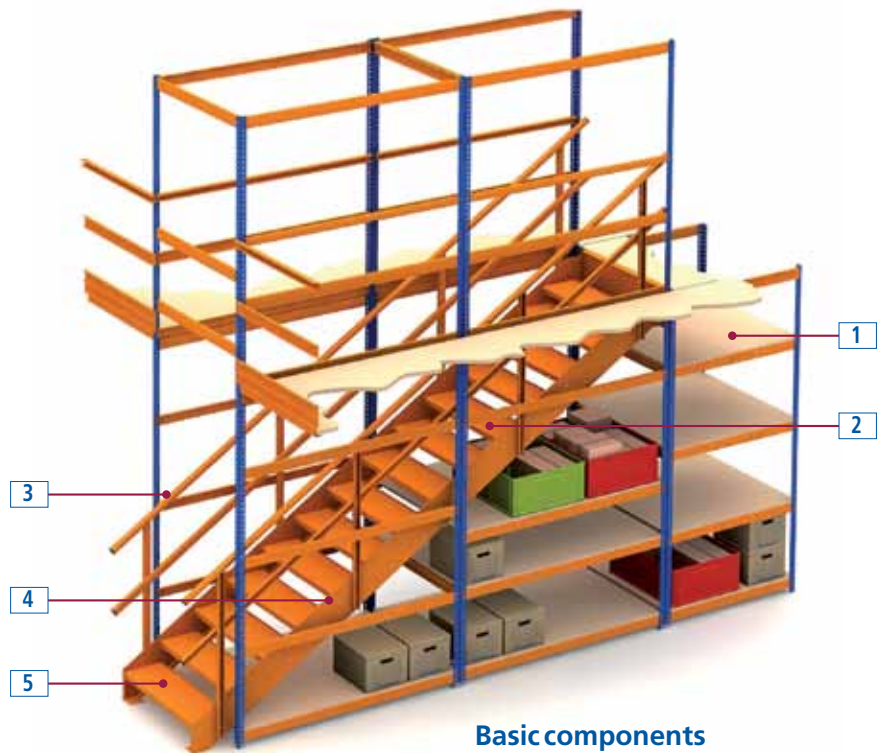

### Basic components

1. Floor
2. Stairs
3. Handrail
4. Support beam
5. Step

In this type of structure Metal Point Plus is used, since it is the option with the greatest load-bearing capacity.



#### Support beam

This is the profile that joins the stairs to the Metal Point shelving structure.



#### Handrail

This is a rectangular profile with a plastic cap on the end.

#### Floor

There are different types of floor to meet different needs, depending on the load, type of work, handling equipment used, etc.

These floors can be made of chipboard, single-sided melamine, or metal panels when greater load capacity is required.



#### Metal step

Made of sheet metal and painted orange, Mecalux offers steps in two different widths: 900 and 1,000 mm.



#### Landing

When necessary, landings can be installed.

# International Presence



## 4 Technological Centres

(1) The centre for research and development of **engineering projects and automated equipment** can be found in Barcelona, Spain.

(2) The centre for the development of **warehouse management products and software** is based in Gijón, Spain.



(3) The research centre for **automated systems** is located in Gliwice, Poland.

(4) Mecalux has another research and development centre **for engineering projects** in Chicago, USA.

**Gliwice Plant<sup>(3)</sup>**  
(POLAND)  
53,500 m<sup>2</sup>



**Barcelona Plant<sup>(1)</sup>**  
(SPAIN)  
40,000 m<sup>2</sup>

-  Sales network
-  Production centres



**HEAD OFFICE - SPAIN** - Silici, 1 - 08940 Cornellà de Llobregat - Barcelona  
**Tel. +34 932 616 913 – info@mecalux.com – www.mecalux.com**

#### EUROPE

##### BELGIUM

Tel. +32 2 346 90 71  
info@mecalux.be  
**www.mecalux.be**

##### CZECH REPUBLIC

Tel. +420 222 524 240  
info@mecalux.cz  
**www.mecalux.cz**

##### FRANCE

Tel. +33 01 60 11 92 92  
info@mecalux.fr  
**www.mecalux.fr**

##### GERMANY

Tel. +49 (0) 2131 40 760  
info@mecalux.de  
**www.mecalux.de**

##### ITALY

Tel. +39 02 98836601  
info@mecalux.it  
**www.mecalux.it**

##### NETHERLANDS

info@mecalux.co.nl  
**www.mecalux.co.nl**

##### POLAND

Tel. +48 32-331 69 66  
info@mecalux.pl  
**www.mecalux.pl**

##### PORTUGAL

Tel. +351 21 415 18 90  
info@mecalux.pt  
**www.mecalux.pt**

##### SLOVAKIA

Tel. + 421 220 545 117  
info@mecalux.sk  
**www.mecalux.sk**

##### TURKEY

Tel. +90 216 706 10 15  
info@mecalux.com.tr  
**www.mecalux.com.tr**

##### UNITED KINGDOM

Tel. +44 0121 3336 602  
info@mecalux.co.uk  
**www.mecalux.co.uk**

#### AMERICA

##### ARGENTINA

Tel. +54 (11) 4006-4444  
info@mecalux.com.ar  
**www.mecalux.com.ar**

##### BRAZIL

Tel. +55 11 4134-2155  
info@mecalux.com.br  
**www.mecalux.com.br**

##### CHILE

Tel. +56 (2) 2827 6000  
info@mecalux.cl  
**www.mecalux.cl**

##### MEXICO

Tel. +52 (664) 647 22 00  
info@mecalux.com.mx  
**www.mecalux.com.mx**

##### PERU

Tel. +51 (1) - 422 6060  
info@mecalux.pe  
**www.mecalux.pe**

##### URUGUAY

Tel. +598 2683-8879  
info@mecalux.com.uy  
**www.mecalux.com.uy**

##### USA

Tel. 1-877-632-2589  
info@interlakemecalux.com  
**www.interlakemecalux.com**

